


Body Vent (Bleeder) Fittings


Standard Hex Head Style

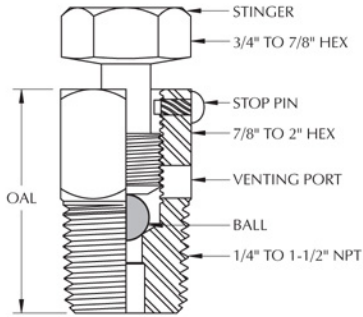

THREAD SIZE	MATERIAL	PART NO.	HEX SIZE	OAL	PLATING	HEAT TREATMENT	BALL
1-1/2" NPT	1215	BV112	2"	2-5/8"	Zinc-Cobalt	---	440 SS
	316 SS	BV112-2	2"	2-5/8"	---	Annealed (NACE)	**TC
	4140	BV112-3				Rc 22 Max (NACE)	
1-1/4" NPT	1215	BV114	1-3/4"	2-5/16"	Zinc-Cobalt	---	440 SS
	316 SS	BV114-2	1-3/4"	2-5/16"	---	Annealed (NACE)	TC
	4140	BV114-3				Rc 22 Max (NACE)	
1" NPT	1215	BV1	1-5/16"	2-3/16"	Zinc-Cobalt	---	440 SS
	316 SS	BV1-2	1-5/16"	2-3/16"	---	Annealed (NACE)	TC
	4140	BV1-3				Rc 22 Max (NACE)	
3/4" NPT	1215	BV34	1-1/8"	1-5/8"	Zinc-Cobalt	---	440 SS
	316 SS	BV34-2	1-1/8"	1-5/8"	---	Annealed (NACE)	TC
	4140	BV34-3				Rc 22 Max (NACE)	
1/2" NPT	1215	BV12	7/8"	1-1/2"	Zinc-Cobalt	---	440 SS
	316 SS	BV12-2	7/8"	1-1/2"	---	Annealed (NACE)	TC
	4140	BV12-3				Rc 22 Max (NACE)	
3/8" NPT	1215	BV38	7/8"	1-9/16"	Zinc-Cobalt	---	440 SS
	316 SS	BV38-2	7/8"	1-9/16"	---	Annealed (NACE)	TC
	4140	BV38-3				Rc 22 Max (NACE)	
1/4" NPT	1215	BV14	7/8"	1-5/8"	Zinc-Cobalt	---	440 SS
	316 SS	BV14-2	7/8"	1-5/8"	---	Annealed (NACE)	TC
	4140	BV14-3				Rc 22 Max (NACE)	

For Service to 10,000 PSI

Hex Socket Head Style



THREAD SIZE	MATERIAL	PART NO.	HEX SIZE	OAL	PLATING	HEAT TREATMENT	BALL
3/4" NPT	1215	BV34-AH	1-1/8"	1-5/8"	Zinc-Cobalt	---	440 SS
	316 SS	BV34-AH-2	1-1/8"	1-5/8"	---	Annealed (NACE)	**TC
	4140	BV34-AH-3				Rc 22 Max (NACE)	
1/2" NPT	1215	BV12-AH	7/8"	1-1/2"	Zinc-Cobalt	---	440 SS
	316 SS	BV12-AH-2	7/8"	1-1/2"	---	Annealed (NACE)	TC
	4140	BV12-AH-3				Rc 22 Max (NACE)	
3/8" NPT	1215	BV38-AH	7/8"	1-9/16"	Zinc-Cobalt	---	440 SS
	316 SS	BV38-AH-2	7/8"	1-9/16"	---	Annealed (NACE)	TC
	4140	BV38-AH-3				Rc 22 Max (NACE)	
1/4" NPT	1215	BV14-AH	7/8"	1-5/8"	Zinc-Cobalt	---	440 SS
	316 SS	BV14-AH-2	7/8"	1-5/8"	---	Annealed (NACE)	TC
	4140	BV14-AH-3				Rc 22 Max (NACE)	

For Service to 10,000 PSI